



Rad-hard 60 V, 0.6 A PNP transistor

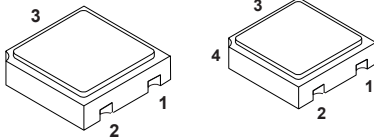

LCC-3

UB

Pin 4 in UB is connected to the metallic lid.



DS10460

Features

V_{CBO}	$I_C(max.)$		H_{FE} at 10 V, 150 mA	$T_j(max.)$
60 V	ESCC	0.5 A	> 100	200 °C

- Hermetic packages
- ESCC qualified
- 100 krad

Description

The 2N2907AHR is a bipolar transistor able to operate under severe environment conditions and radiation exposure providing high immunity to total ionizing dose (TID).

Qualified as per ESCC 5202/001 specification and available in LCC-3 and UB hermetic packages, it is specifically recommended for space and harsh environment applications and suitable for low current and high precision circuits such preamplifiers, oscillators, current mirror configuration.

In case of discrepancies between this datasheet and the relevant agency specification, the latter takes precedence.

Product status link

[2N2907AHR](#)

Product summary

Product summary				
Part-number	Qualification system	Agency specification	Package	Radiation level
2N2907ARUBx	ESCC Flight	5202/001	UB	100 krad
2N2907AUBx	ESCC Flight	5202/001	UB	-
SOC2907ARHRx	ESCC Flight	5202/001	LCC-3	100 krad
SOC2907AHRx	ESCC Flight	5202/001	LCC-3	-

Note: See [Table 7](#) for ordering information.

1 Electrical ratings

Note: For PNP transistor voltage and current polarity is reversed.

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit	
V_{CBO}	Collector-base voltage ($I_E = 0$)	-60	V	
V_{CEO}	Collector-emitter voltage ($I_B = 0$)	-60	V	
V_{EBO}	Emitter-base voltage ($I_C = 0$)	-5	V	
I_C	Collector current	0.5	A	
P_{TOT}	Total dissipation at $T_{amb} \leq 25\text{ °C}$	LCC-3 and UB	0.4	W
		LCC-3 and UB ⁽¹⁾	0.73	
T_{OP}	Operating temperature range	-65 to 200	°C	
T_J	Max. operating junction temperature	200	°C	

1. When mounted on a 15 x 15 x 0.6 mm ceramic substrate.

Table 2. Thermal data

Symbol	Parameter	LCC-3 and UB Value	Unit
R_{thJA}	Thermal resistance junction-ambient (max.)	437.5 240 ⁽¹⁾	°C/W

1. When mounted on a 15 x 15 x 0.6 mm ceramic substrate.

2 Electrical characteristics

2.1 Electrical characteristics

Table 3. Electrical characteristics ($T_{amb} = 25\text{ °C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Max.	Unit
I_{CBO}	Collector-base cut-off current ($I_E = 0$)	$V_{CB} = 50\text{ V}$		10	nA
		$V_{CB} = 50\text{ V}, T_{amb} = 150\text{ °C}$		10	μA
I_{CEX}	Collector-emitter cut-off current	$V_{CE} = 30\text{ V}, V_{BE} = -0.5\text{ V}$		50	nA
$V_{(BR)CBO}$	Collector-base breakdown voltage ($I_E = 0$)	$I_C = 10\text{ }\mu\text{A}$	60		V
$V_{(BR)CEO}^{(1)}$	Collector-emitter breakdown voltage ($I_B = 0$)	$I_C = 10\text{ mA}$	60		V
$V_{(BR)EBO}$	Emitter-base breakdown voltage ($I_C = 0$)	$I_C = 10\text{ }\mu\text{A}$	5		V
$V_{CE(sat)}^{(1)}$	Collector-emitter saturation voltage	$I_C = 150\text{ mA}, I_B = 15\text{ mA}$		0.4	V
$V_{BE(sat)}^{(1)}$	Base-emitter saturation voltage	$I_C = 150\text{ mA}, I_B = 15\text{ mA}$		1.3	V
$h_{FE}^{(1)}$	DC current gain	$I_C = 0.1\text{ mA}, V_{CE} = 10\text{ V}$	75		
		$I_C = 10\text{ mA}, V_{CE} = 10\text{ V}$	100		
		$I_C = 150\text{ mA}, V_{CE} = 10\text{ V}$	100	300	
		$I_C = 500\text{ mA}, V_{CE} = 10\text{ V}$	50		
h_{fe}	Small signal current gain	$I_C = 20\text{ mA}, f = 100\text{ MHz}, V_{CE} = 20\text{ V}$	2		
C_{OBO}	Output capacitance ($I_E = 0$)	$100\text{ kHz} \leq f \leq 1\text{ MHz}, V_{CB} = 10\text{ V}$		8	pF
t_{on}	Turn-on time	$I_{CC} = 150\text{ mA},$ $I_{B1} = 15\text{ mA},$ $V_{CC} = 30\text{ V}$		45	ns
t_{off}	Turn-off time	$I_{CC} = 150\text{ mA},$ $I_{B1} = -I_{B2} = 15\text{ mA},$ $V_{CC} = 30\text{ V}$		300	ns

1. Pulsed duration = 300 μs , duty cycle $\leq 1.5\%$

2.2 Radiation assurance

Radiation test are guaranteed in compliance with ESCC 22900 and ESCC 5202/001 specifications.

Each lot is tested in radiation according to the following procedure:

- Radiation condition of 0.1 rad (Si)/s.
- Test of 11 samples by wafer, 5 biased at 80% of $V_{(BR)CEO}$, 5 unbiased and for reference.
- Acceptance criteria in compliance with the post radiation electrical characteristics as per [Table 4](#).

Table 4. ESCC 5202/001 post radiation electrical characteristics ($T_{amb} = 25\text{ °C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max	Unit
I_{CBO}	Collector cut-off current ($I_E = 0$)	$V_{CB} = 50\text{ V}$		-	10	nA
I_{CEX}	Collector-emitter cut-off current	$V_{CE} = 30\text{ V}$, $V_{BE} = -0.5\text{ V}$		-	50	nA
$V_{(BR)CBO}$	Collector-base breakdown voltage ($I_E = 0$)	$I_C = 10\text{ }\mu\text{A}$	60	-		V
$V_{(BR)CEO}^{(1)}$	Collector-emitter breakdown voltage ($I_B = 0$)	$I_C = 10\text{ mA}$	60			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage ($I_C = 0$)	$I_E = 10\text{ }\mu\text{A}$	5	-		V
$V_{CE(sat)}^{(1)}$	Collector-emitter saturation voltage	$I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$		-	0.4	V
$V_{BE(sat)}^{(1)}$	Base-emitter saturation voltage	$I_C = 150\text{ mA}$, $I_B = 15\text{ mA}$		-	1.3	V
$[h_{FE}]^{(1)}$	Post irradiation gain calculation ⁽²⁾	$I_C = 0.1\text{ mA}$, $V_{CE} = 10\text{ V}$	[30]	-		
		$I_C = 10\text{ mA}$, $V_{CE} = 10\text{ V}$	[50]	-		
		$I_C = 150\text{ mA}$, $V_{CE} = 10\text{ V}$	[50]	-	300	
		$I_C = 500\text{ mA}$, $V_{CE} = 10\text{ V}$	[25]	-		

1. Pulsed duration = 300 μs , duty cycle $\geq 2\%$

2. The post-irradiation gain calculation of $[h_{FE}]$, made using h_{FE} measurements from prior to and on completion of irradiation testing and after each annealing step if any, shall be as specified in MILSTD-750 method 1019.

2.3 Electrical characteristics (curves)

Figure 1. DC current gain ($V_{CE} = 1\text{ V}$)

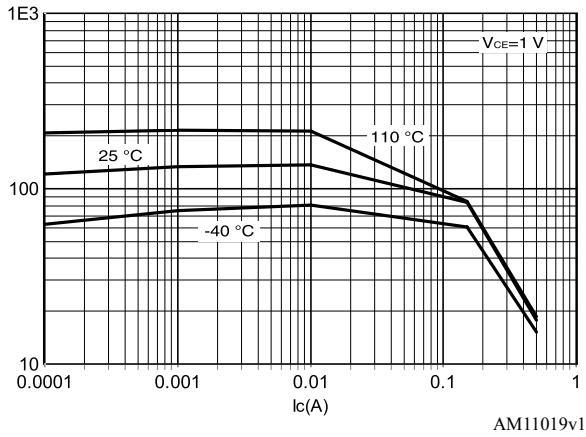


Figure 2. DC current gain ($V_{CE} = 10\text{ V}$)

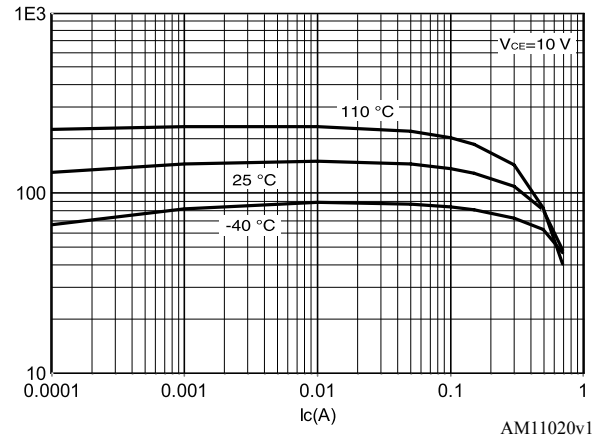


Figure 3. Collector emitter saturation voltage


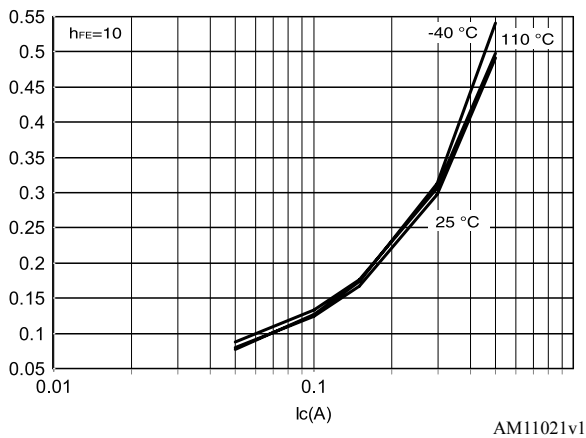


Figure 4. Base emitter saturation voltage ($h_{FE} = 10$)

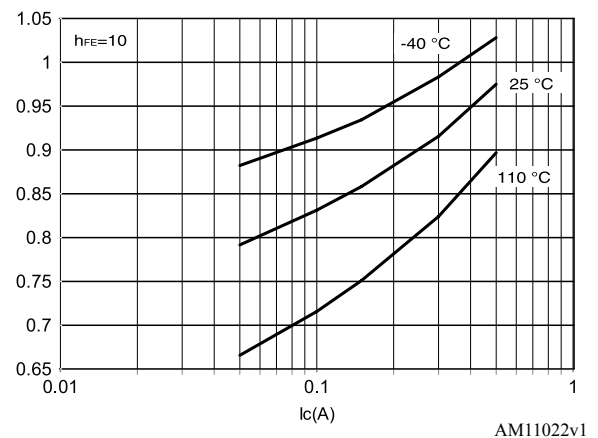


3 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

3.1 UB package information

Figure 5. UB package outline

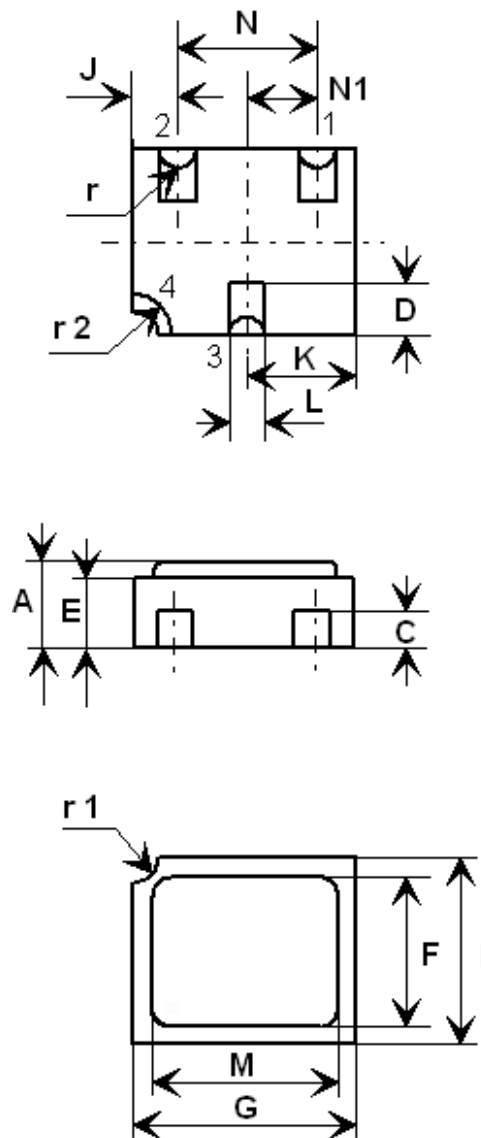

Pad 1: Emitter

Pad 2: Base

Pad 3: Collector

Pad 4: Shielding connected to the lid


8206487

Table 5. UB package mechanical data

Symbols	Dimensions in mm			Dimensions in inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.17		1.42	0.045		0.056
C	0.46	0.51	0.56	0.018	0.020	0.022
D	0.56	0.76	0.96	0.024	0.030	0.036
E	0.92	1.02	1.12	0.036	0.040	0.044
F	1.95	2.03	2.11	0.077	0.080	0.083
G	2.92	3.05	3.18	0.115	0.120	0.125
I	2.41	2.54	2.67	0.095	0.100	0.105
J	0.42	0.57	0.72	0.0165	0.0225	0.0285
K	1.37	1.52	1.67	0.054	0.060	0.066
L	0.41	0.51	0.61	0.016	0.020	0.024
M	2.46	2.54	2.62	0.097	0.100	0.103
N	1.81	1.91	2.01	0.071	0.075	0.079
N1	0.91	0.96	1.02	0.036	0.038	0.040
r		0.20			0.008	
r1		0.30			0.012	
r2		0.56			0.022	

3.2 LCC-3 package information

Figure 6. LCC-3 package outline

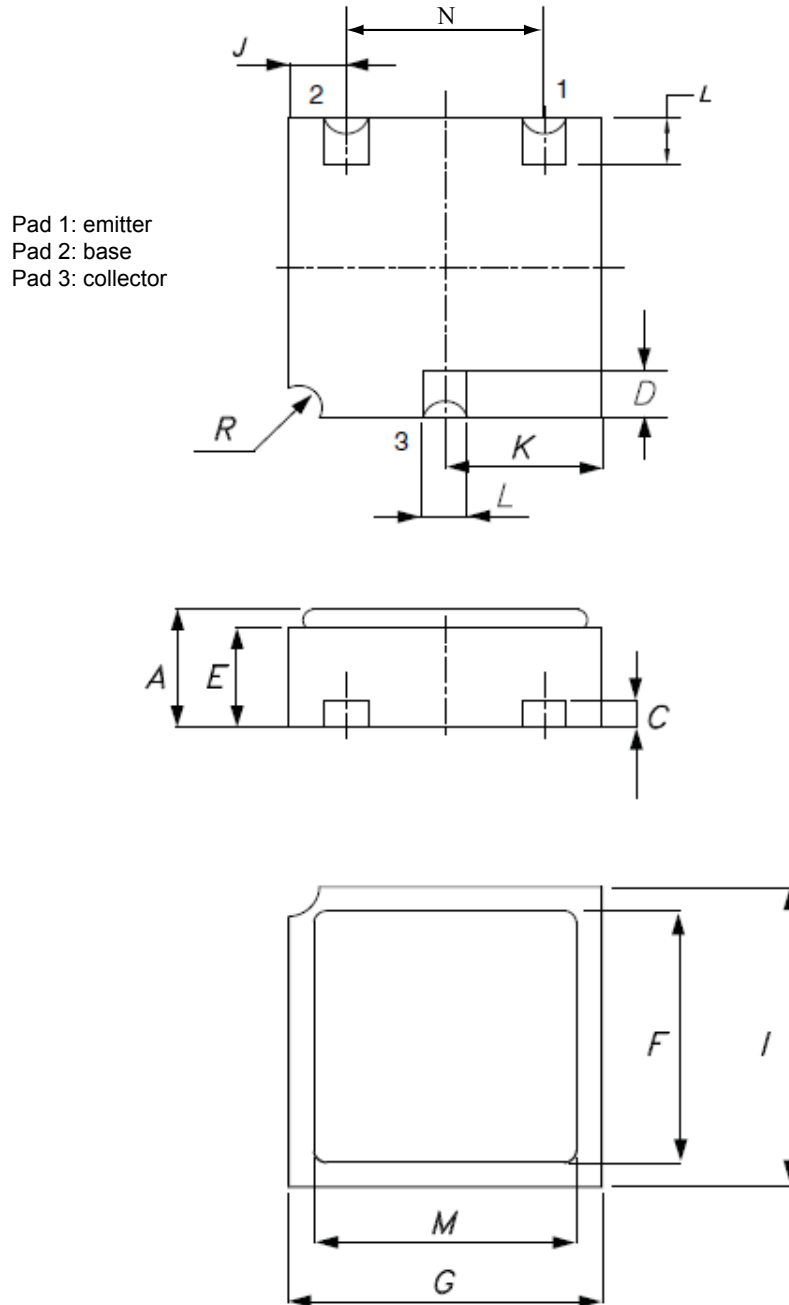

0041211 rev.14

Table 6. LCC-3 package mechanical data

Symbols	Dimensions in mm			Dimensions in inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.16		1.42	0.046		0.056
C	0.45	0.50	0.56	0.018	0.020	0.022
D	0.56	0.76	0.96	0.022	0.030	0.038
E	0.91	1.01	1.12	0.036	0.040	0.044
F	1.95	2.03	2.11	0.077	0.080	0.083
G	2.92	3.05	3.17	0.115	0.120	0.125
I	2.41	2.54	2.66	0.095	0.100	0.105
J	0.42	0.57	0.72	0.0165	0.0225	0.0285
K	1.37	1.52	1.67	0.054	0.060	0.066
L	0.40	0.50	0.60	0.016	0.020	0.024
M	2.46	2.54	2.62	0.097	0.100	0.103
N	1.80	1.90	2.00	0.071	0.075	0.079
R		0.30			0.012	

4 Ordering information

Table 7. Ordering information

Part number	ESCC specification	Screening option	Radiation level	Package	Mass	Lead finish	Marking ⁽¹⁾	Packing
2N2907AUB1	-	Engineering model	-	UB	0.6 g	Gold	2N2907AUB1	WafflePack
SOC2907A1	-		-	LCC-3			SOC2907A1	
2N2907ARUBG	5202/001/06R	100 krad	UB	Gold		520200106R		
2N2907ARUBT	5202/001/07R			Solder Dip		520200107R		
2N2907ARUBTW	5202/001/07R			Solder Dip		520200107R	Tape and reel	
2N2907AUBG	5202/001/06			Gold		520200106	WafflePack	
2N2907AUBT	5202/001/07			Solder Dip		520200107		
SOC2907ARHRG	5202/001/04R			100 krad		LCC-3	Gold	520200104R
SOC2907ARHRT	5202/001/05R	Solder Dip	520200105R				Tape and reel	
SOC2907ARHRTW	5202/001/05R	Solder Dip	520200105R				Tape and reel	
SOC2907AHRG	5202/001/04	Gold	520200104				WafflePack	
SOC2907AHRT	5202/001/05	Solder Dip	520200105					
SOC2907AHRTW	5202/001/05	Solder Dip	520200105		Tape and reel			

1. Specific marking only. The full marking includes in addition: For the Engineering Models: ST logo, date code; country of origin (FR). For ESCC flight parts: ST logo, date code, country of origin (FR), ESA logo, serial number of the part within the assembly lot.

Contact ST sales office for information about specific conditions for products in die form.



5 Other information

5.1 Traceability information

Table 8. Date codes

Model	Date code
EM	3yywwN
ESCC	yywwN

1. yy = year, ww = week number, N = lot index in the week.

5.2 Documentation

Table 9. Documentation provided for each type of product

Quality level	Radiation level	Documentation
Engineering model	-	Certificate of conformance
Flight model	-	Certificate of conformance ESCC qualification maintenance lot reference
Flight model	100 krad	Certificate of conformance ESCC qualification maintenance lot reference Radiation verification test (RVT) report at 25 / 50 / 70 / 100 krad at 0.1 rad / s.

Revision history

Table 10. Document revision history

Date	Revision	Changes
09-Feb-2009	1	Initial release.
05-Jan-2010	2	Modified Table 1: Device summary
30-Nov-2011	3	Minor text changes in the document title and description on the coverpage
14-May-2012	4	New package inserted (UB). Updated: – Table 1: Device summary, Table 2: Absolute maximum ratings and Table 3: Thermal data. – Section 2: Electrical characteristics and Section 4: Package mechanical data. Added: – Section : and Section 6: Shipping details.
03-Jun-2013	5	Added: – New section Radiation hardness assurance – Corrected the revision number and dates of revision 3.
18-Sep-2013	6	Updated Table 1: Device summary and Table 13: Ordering information
05-May-2014	7	Updated Table 1: Device summary, Table 13: Ordering information and Section 3: Radiation hardness assurance. Added Figure 2: Safe operating area for TO-18 and Figure 3: Safe operating area for LCC-3
29-May-2014	8	Added note 1 in Table 13: Ordering information.
21-Aug-2015	9	Modified: <i>Section 4.3: TO-18 package information</i> Minor text changes.
02-Dec-2015	10	Updated <i>Figure 2.: Safe operating area for TO-18</i> and <i>Figure 3.: Safe operating area for LCC-3</i> . Minor text chages.
16-Apr-2020	11	Removed <i>TO-18 package information</i> . Minor text changes.
02-Feb-2021	12	Updated <i>Table 1, Table 1, Table 4, Figure 6, Table 7 and Table 9</i> . Removed Radiation summary table. Minor text changes.
16-Nov-2021	13	Updated <i>Features, Description and Product summary</i> on cover page. Updated <i>Table 1, Table 2, Table 7, Table 8 and Table 9</i> . Updated Section 2 Electrical characteristics.
10-Feb-2022	14	Updated <i>Description, Section 2.2 Radiation assurance, Table 7 and Table 9</i> .
11-Dec-2024	15	Updated Figure 5 .

Contents

1	Electrical ratings	2
2	Electrical characteristics	3
2.1	Electrical characteristics	3
2.2	Radiation assurance	4
2.3	Electrical characteristics (curves)	5
3	Package information	6
3.1	UB package information	6
3.2	LCC-3 package information	8
4	Ordering information	10
5	Other information	11
5.1	Traceability information	11
5.2	Documentation	11
	Revision history	12

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved